

## Hydraulic Rock Drill Attachment



The **SONIC** series is an excellent choice in rock and soil drilling rigs, with a variety of surface hammer possibilities or with a bottom hammer rotator. They can be used in Geotechnics, Foundation, Civil Construction services in general. This equipment generates high productivity with low operating costs and 100% Brazilian technology.



#### **BENEFITS**

- Multiple functions: Drilling, Digging and Breaking;
- Reduction of diesel consumption, the same as the excavator;
- Low maintenance cost;

#### TECHNICAL DATA

- Drilling diameters between 1" to 18" (25 to 450mm \* upon request);
- Radio Control Operation;
- Advance Motor with Planetary Gearbox and Brake
- 360° boom swivel;
- Hydraulic Centralizer (Optional) for Surface Hammers;
- Shank Changer for 1 Shank (Optional) for Surface Hammers.

#### **AVAILABLE ITEMS**












| MODEL             | MW-140 / 120HR  | EX-530X                               | MW80A-57                              | MW80A-125                             | W19                                   |
|-------------------|---|---------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|
| Air Consumption   | 600 CFM - 700 CFM<br>(14 -20 m³/min)<br>375 - 600 CFM<br>(11 - 17 m³/min) | 24 GPM<br>90,84 L/Min                 | 16 GPM<br>60,56 L/Min                 | 24 GPM<br>90,84 L/Min                 | 180 CFM<br>120 L/min<br>140 bar       |
| Work Pressure     | 2176 psi  | 2500 psi                              | 2500-4000 psi                         | 2500-4000 psi                         | 140 bar -2.030 psi                    |
| Impact Power      | 9,3 kW / 8,5 kW   | 10 kW                                 | -                                     | -                                     | 19 kW                                 |
| Torque Rotation   | 650 Nm  | 110 Nm                                | 2250 Ft/lbs                           | 7400 Ft/ lbs                          | 750 Nm (533 lbf/ft)                   |
| RPM Rotation      | 0 -180  | 150 - 300                             | 0 - 500                               | 0 - 300                               | 0 - 150                               |
| Drilling Diameter | 2" - 4"   | 1" - 2"                               | 3. 1/2" - 10"                         | 3.5" - 18"                            | 2. 1/2" - 4"                          |
| Application       | Geotechnics and Civil<br>Construction                                     | Geotechnics and Civil<br>Construction | Geotechnics and Civil<br>Construction | Geotechnics and Civil<br>Construction | Geotechnics and Civil<br>Construction |

## ACCESSORIES (Optional)


- Digital Inclinometer;
- Water Cleaning System;
- Installing the Compressor Support at the rear
- of the mini excavator;
- Compressor activation in the cabin;
- 360 degree drill positioning on the
- X and Y axes;
- Hydraulic Centralizer;
- Rod Changer;
- 720 degrees of Positioning.



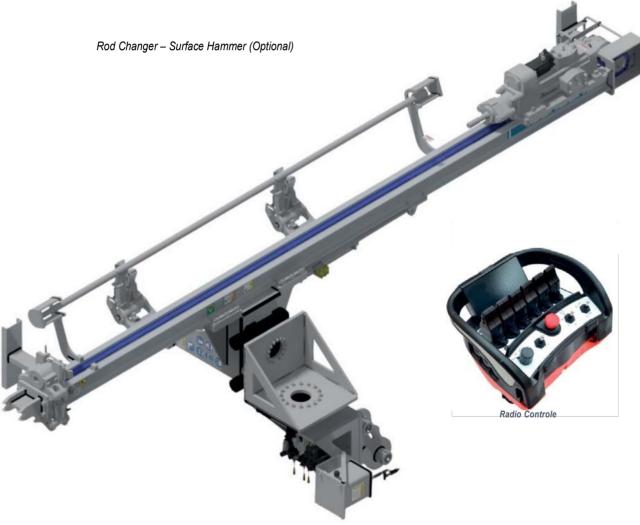

## **DIMENSIONS FOR TRANSPORT**



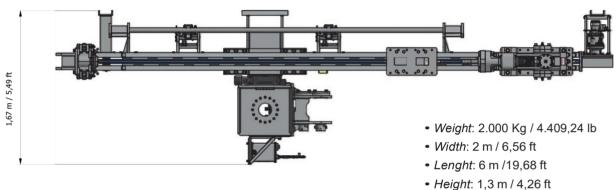



## шшш.шolfdrill.com

# HEADQUARTER United States

**WOLF** Americas

(a) info@wolfdrill.com

**(**) +1 407 704 - 2051

#### FACTORY BRAZIL

Brazil / Indaiatuba-SP

info@wolf.com.br

**(**) +55 (19) 3825 6530

WOLF Equipamentos, reserves the right to alter specifications without Notice.

Machines shown in pictures may be equipped with options.