FOX 12-30 *ULTRA*

HYDRAULIC ROCK DRILLING RIG





FOX - 12-30 ULTRA

Introducing the New FOX I2-30: Power, Precision and Innovation in One Device!

The FOX 12-30 ULTRA hits the market as the newest benchmark in performance, technology and reliability. Designed to meet the demands of larger drilling diameters, it combines structural robustness with advanced features that ensure maximum efficiency and productivity in any operation.

With an intelligent design, simplified operation and optimized features for safety and economy, the FOX 12-30 ULTRA represents the latest in its class.

The new FOX 12-30 ULTRA arrives with an even more robust W 25 hammer, capable of operating with a diameter of up to 5" (127 mm).

With a reverse percussion system and the exclusive Dampening System, the W25 hammer reduces vibrations and excessive impacts. Whatever the challenge, it delivers top-notch performance with the precision you need and the durability your business demands.



W25 Hydraulic Hammer

HYDRAULIC HAMMER: W25

Working pressure: 170 bar (2,465 PSI)

Impact Power: 25 kw (34hp)
Impact Frequency: 3600 BPM

Weight: 250kg

Rotational Torque: 1846 Nm 1362 lbf/ft)

Thread Type: T45

Drilling Diameter: 3" - 5"

Magazine / Qty. of Rods: Carousel 6 + 1 Rod

Length: 3.6m (12")

Percussion: With Reverse System: Dampening System

Benefits of the Dampening System

The **Dampening System** is an impact absorption system designed to protect the Top Hammer Hammer and improve its durability and performance. The FOX 12-30 ULTRA, equipped with the **W25 hammer**, delivers more robustness, productivity and reliability for intense operations.

Its benefits include:

- Less hammer and shank wear.
- Longer service life of internal components.
- More comfort for the operator (less vibration in the cab and structure).





The Equipment

The **FOX 12-30 ULTRA** offers two air-conditioned cab options: the Standard version, which already exceeds safety and comfort standards, and the optional version, with ROPS/FOPS homologation.

High Performance Hydraulic System: Equipped with 2 hydraulic pumps (piston/gear) with load sensing, coupled to the diesel engine for maximum efficiency.

LED Lighting: Powerful headlights to ensure safe and effective operations, even at night.

Joystick Commands: Simplified operation for a single operator. Inside the cab, all controls are strategically positioned to maximize efficiency and safety.



Unmatched Power and Versatility!

Extensive Boom: Increase drilling reach by up to 1.2 meters, avoiding unnecessary travel and maximizing productivity.

Audible Safety: Audible reverse warning that alerts the movement of the equipment, increasing safety in the workplace.

Suction Efficiency: Movable nozzle/hood of the dust collector, facilitating visualization and ensuring perfect sealing for optimized suction.

Designed for demanding terrain: Delivers stability even in hard or fractured rocks, ensuring consistent and reliable drilling.



Master drilling with absolute precision.

New 10-Inch Display: Designed with new features for precise drilling. **Interactive Digital Display inside the Cab** always showing and monitoring **all the indicators of Pressure, Flow, Temperatures, Operations** and with the built-in DIGITAL INCLINOMETER, giving a correct angle of the boom for drilling (X and Y axes).

In this Digital Display, ALERTS TO OPERATOR are also presented, indicating that the equipment is close to or at the time of performing PREVENTIVE MAINTENANCE and presenting POSSIBLE SOLUTIONS TO PROBLEMS ENCOUNTERED.



Cutting-edge technology at your fingertips.

Structural Steel Chassis: Built for heavy duty, with two compensating cylinders that allow for a \pm 10° front/rear oscillation, ideal for rough terrain.

Forged Rollers: Oil-lubricated, maintenance-free, providing continuous, worry-free operation.

Special Steel Track: 350mm wide triple shoes, links, pins and bushings heat treated for maximum durability.

Technical Data

DIESEL ENGINE

Cummins

Model 6cc 6CTA 8.3 - 234HP

Water Cooled

Diesel Tank Capacity 300 lt

ROD CHANGER

Carousel Type with 3.66 m (12') Rods

Capacity 6+1 Rods Shaft Greaser

SPEAR

Length: 7 meters

Usable length: 4.5m and 8" wideE agora

HYDRAULIC CHAIN FEED

Planetary Gearbox System

TRACTION

Maximum speed: 3.8 Km/h Traction force 56596 N Hill ramp: 36% T

ruck sway: +/- 10°

COMPRESSOR UNIT

Screw Type;

Flow Rate: 300 - 347 CFM/PCM; Pressure: 105 - 145 PSI (7 - 10 bar)

DUST COLLECTOR (Standard)

Cyclone type primary / Secondary 12 filters Suction capacity: 35m³/min (882 CFM)

CLEANING SYSTEM (optional)

Water Cleaning

Tank capacity: 150 liters (33 gal)

Note: the FOX series of equipment is equipped with a Dust Collector and/or Water Cleaning system to meet the requirements of the NRM Mining Regulatory Standards, which deals with Decree-Law No. 227 of 02/28/1967. In detail, NRM 09 - Items 9.1.3.1 and 9.1.3.2

Access the Rops/Fops test video:



OPTIONAL ITEMS

Dust Collector (Primary and Secondary)

Anti-Jamming

Night Lights (Additional 04 headlights)

Sound Kit (Horn + Siren)

Water Tank

NR13 Certified Water Tank

Nitrogen Loader

Rearview

Emery

Emergency Button (Installed on Boom)

ROPS and FOPS Approved Air-Conditioned Cab

Radio Inside the Cab

Depth gauge

12-30

STANDARD STANDARD

STANDARD

STANDARD

OPTIONAL

OPTIONAL

OPTIONAL

OPTIONAL

OPTIONAL OPTIONAL

OPTIONAL

OPTIONAL

OPTIONAL





WOLF CARE+ You produce, we take care!

Preventive follow-up program: According to factory service intervals to maximize performance and minimize unexpected downtime;

Preventive visits: WOLF Care+ reduces the risk of unexpected breakdowns by increasing the availability of your equipment. Our technicians are highly trained to make the necessary checks, always bringing the best performance of your WOLF Drill;

P.M.P. - **Preventive Maintenance Program:** Scheduled Maintenance carefully following the PMP, developed by our team of technicians and engineers. (Except wear parts and lubricants)


Information

BENEFITS


PMP - PREVENTIVE MAINTENANCE PLAN (sold separately); EXTENDED EQUIPMENT WARRANTY;

TRANSPORT

 Length: 8,951 mm
 Width: 3,035 mm
 Height: 3,752 mm
 Weight: 13,000 kg

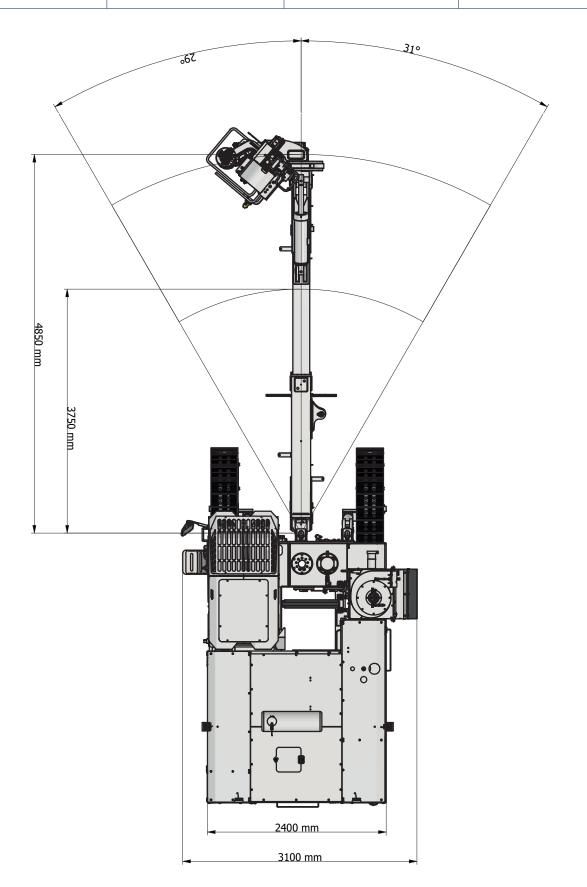

Dimensions

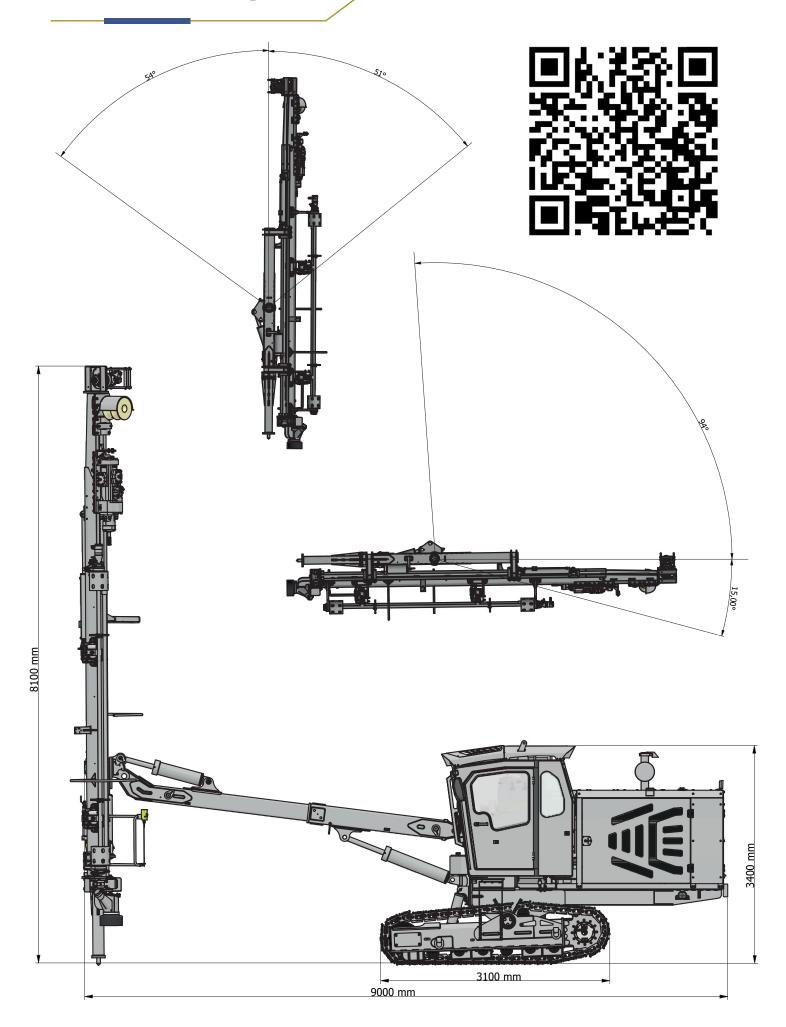



Headquarters – Factory (Indaiatuba/SP – Brasil)
+ 55 (19) 3825-6530
info@wolf.com.br
www.wolf.com.br

Branche

WOLF - Minas Gerais

(Belo Horizonte/MG)

Performance: MG

+ 55 (31) 3361-0648

mg@wolf.com.br

WOLF - Paraná

(Colombo/PR)

Performance: PR / SC

+ 55 (41) 3656-3572

parana@wolf.com.br

WOLF Américas

United States (U.S)

+1 (407) 704-2051

info@wolfdrill.com

www.wolfdrill.com

WOLF - Mato Grosso

(Nobres - MT)

Performance: MT

+ 55 (65) 99973-0565

mt@wolf.com.br

WOLF - Rio Grande do Sul

(Porto Alegre/RS)

Performance: RS

+ 55 (51) 3059-9023

rs@wolf.com.br

WOLF - Nordeste

(Salvador/BA)

Performance: BA/SE/PE/AL/PB/RN

+ 55 (71) 3379-6959

bahia@wolf.com.br